

BMW R 1200 GS Upper Crash Bars INSTALLATION INSTRUCTIONS

The most up to date instructions can be downloaded from the product page at altrider.com, under the instructions tab.

Dear Rider,
Thank you for choosing Altrider! Whether a seasoned world adventurer or a first time ADV-Newbie, we welcome you to the Altrider experience. You can install your new product with the utmost confidence. Altrider designs, tests, and manufactures all of its products here in the United States. We are proud to do what we do, and honored to present to you the product of our labors.

=njoy it, show it off, and most of all, RID≡ IT!

Venture On, Jeremy LeBreton





Package Contents:

- upper bar assembly
- mounting brackets
- hardware kit
- instructions

AltRider LLC

mailing: 4000 Aurora Ave N Ste 100

Seattle, WA 98103 USA


phone: 206-922-3618

email: info@altrider.com
web: www.altrider.com

Rev 0
MADE IN THE USA





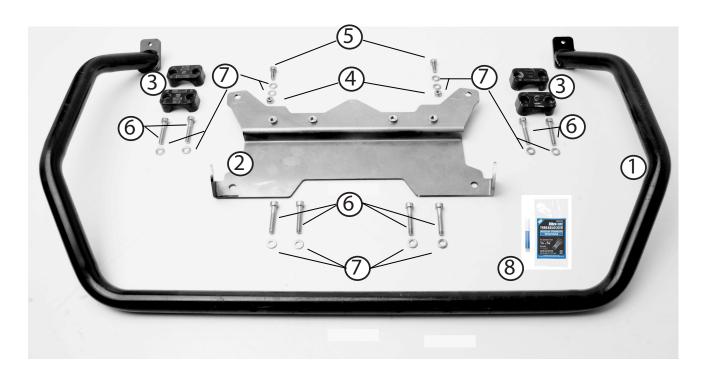

Kit:

- (1) upper crash bar
- (2) upper mount bracket
- (3) (2) clamps (4 1/2 of sets)
- (4) (2) M6 nylock nuts
- (5) (2) M6x16 socket head cap fastener
- (6) (8) M6x 35 socket head cap fasteners
- (7) (12) M6 washers
- (8) (1) 2ml threadlocker




Recommended tools:

- 1) 1/4" ratchet
- (2) 1/4" driver
- 3 M5 allen key
- (4) M10 socket
- (5) T25 torx socket
- 6) 5mm allen socket





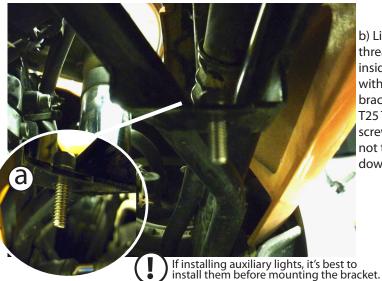


Using the T25 Torx socket, remove the (2) T 25 Torx fasteners from the front beak. Insert (2) M6x16 socket head cap fasteners and (2) M6 washers into the front subframe. See image (a).

Turn the handle bars to access the M6 screws with allen key. Use the M10 socket tool under the bracket to tighten the (2) M6 nylock nuts. Now tighten the (2) OEM T25 beak screws.


b) Line up the threaded clip inside the frame with the front bracket. Start the T25 Torx OEM screws but do not tighten these down yet!

For GSA models, remove existing OEM bars, this frame clip and t30 screw prior to install on the subframe.


a) Place the bracket in the front tabs in front of the frame mounts. Once inside the beak fairing, slide the bracket back then rotate the rear of the bracket up to the frame mounts. Start the (2) M6 nylock nuts with (2) M6 washers.

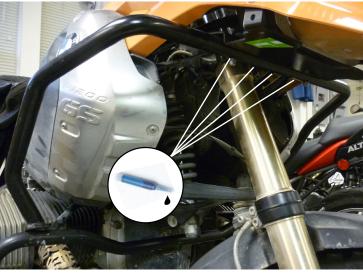

Rest the upper crash bar onto the existing lower crash bar assembly. Use a few drops of threadlockerand and start the (4) M6 x 35 socket head cap fasteners with (4) M6 washers into the upper bracket. All bar fasteners should be left loose.

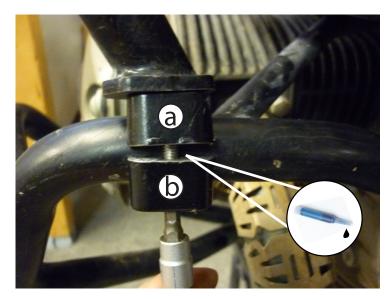

Slide the top clamp (a) under the upper crash bar mount. Apply a few drops of threadlocker to the (4) M6 x 35 socket head cap fasteners and lightly install with M6 washers into the lower clamp (b). Install from the bottom. On both sides, just give a few turns for loose fitment of the bar fasteners for now. Be careful when aligning the fasteners to avoid crossthreading.

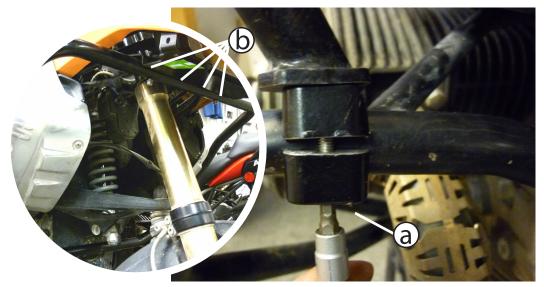

(a) Now slowly tighten both sets of clamps, alternating between front and rear screws so the clamps compress evenly. b) Go back and tighten the (4) M6 upper bar screws.



After 1500 miles of riding with your new equipment installed, inspect the assembly and re-torque all fasteners to ensure they are still tightened properly.

CONGRATULATIONS!

You've completed your installation. If at any point you have questions about your installation or have any feed back for us, we'd love to hear it. A downloadable version of these instructions can be found at our web site. www.AltRider.com

After 1500 miles of riding, inspect the assembly and re-torque all fasteners to ensure they are still tightened properly.

email: info@AltRider.com

phone: +1 206-922-3618

address: 4000 Aurora Ave N

Ste 100

Seattle, WA 98103

TERMS OF USE, WARRANTY AND LIABILITY WAIVER

AltRider LLC, a Washington company, having its principal place of business in Seattle, WA ("AltRider") offers its motorcycle accessories (the "Product") with the terms, conditions and notices as follows:

Terms of Use

This Product is offered to you conditioned upon your acceptance without modification of the terms, conditions, and notices contained herein. Installation and/or use of this product implies acceptance of all such terms, conditions, and notices. If you do not agree to these terms, do not buy the Product. If you have already bought the Product and do not agree to these terms, return this Product promptly including the packaging and all written materials, to AltRider.

Limitation of Liability and Warranty Disclaimer

You may return your merchandise for a full refund or exchange, less any original or return shipping fees under these conditions:

- 1. Only if the merchandise is in 100% factory condition. Original manufacturer's packaging and same condition as sold original boxes, packaging material, instructions, documentation, parts, and attached tags.
- 2. Only unused, unscratched, uninstalled, undamaged merchandise will be accepted. Do not install equipment until you are sure you want to keep it. Package items carefully in protective materials before returning them. Never ship an item in its original manufacturers packaging it will arrive damaged. Please use a postal box or other adequate packaging to ensure your return or exchange is not damaged on the way back to AltRider.com.

To read more about our exchanges and returns policy, on the web, navigate to http://www.altrider.com/info/exchangesAndReturns

Excepting the warranties stated in the preceding paragraph, AltRider hereby disclaims all other warranties and conditions with regard to the Product including all implied warranties and conditions of merchantability and fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof. AltRider does not warrant against damages or defects arising out of use or installation of the Product. Installation instructions are provided for your convenience. AltRider is not responsible for any damages arising out of the installation, improper or otherwise, of the Product. No warranty of any kind, expressed or implied, is made regarding the safety of this Product.

To the extent allowed by law, AltRider shall not be held liable for any direct, indirect, punitive, incidental, special or consequential damages arising out of, or connected with, the use or misuse of this Product. Buyer assumes all risks and liability arising from use of this Product.

Entire Agreement

This document states the entire obligation of AltRider with respect to the Product. If any part of this agreement is determined to be void, invalid, unenforceable or illegal, including, but not limited to the warranty disclaimers and liability limitations set forth above, then the remainder of the agreement shall remain in full force and effect.

Applicable Law

This agreement is governed by the laws of Washington, USA. You hereby consent to the exclusive jurisdiction and venue of the courts of Washington, USA, in all disputes arising out of or relating to the use of this product.



